



# Security in IoT Ecosystem

## Module 2

IoT Pentesting methodology

Prof.: Joaquín Recas

# Table of Contents



1. Introduction
2. IoT Pentesting methodology
  1. Attack Surface Mapping
  2. Embedded device
  3. Firmware, software, and applications
  4. Radio communications
3. Identifying Assets
4. Pentest Cases

# Attify



- IoT Security and Exploitation Education
- Attify helps businesses secure their IoT devices, mobile applications and digital assets.
  - Offering security assessment, **penetration testing** and **training** to organizations all over the world
  - An IoT **penetration test** is the **assessment and exploitation** of various components present in an IoT device solution **to help make the device more secure**

# Reasons for IoT Security Vulnerabilities



- Lack of Security Awareness Among Developers:
  - Developers are often less knowledgeable about the possible security vulnerabilities in IoT devices
- Lack of a Macro Perspective:
  - It is easy for developers to forget about the fact that it is the interconnection of devices and various technologies that could lead to security issues.
- Supply-Chain-Based Security Issues:
  - It is common to have different components of devices being manufactured by different vendors, getting assembled by another vendor, and finally distributed by yet another one
- Usage of Insecure Frameworks and Third-Party Libraries:
  - Normally developers use existing libraries and packages and they introduce potentially vulnerable code samples into the product.

# Table of Contents



1. Introduction
2. IoT Pentesting methodology
  1. Attack Surface Mapping
  2. Embedded device
  3. Firmware, software, and applications
  4. Radio communications
3. Identifying Assets
4. Pentest Cases

# Attack Surface Mappin

- Finding as much **information** as possible about the **device**.
- The entire architecture can be divided into three categories:
  1. Embedded device.
  2. Firmware, software, and applications.
  3. Radio communications.

# Embedded Device Exploitation



- Analysing the **hardware** device for security vulnerabilities will allow us to obtain sensitive information about the target IoT system as well as, in some cases gain, full access to the IoT device.

# Embedded Device Exploitation

- Some of the vulnerabilities found in embedded devices:
  - i. Serial ports exposed.
  - ii. Insecure authentication mechanism used in the serial ports.
  - iii. Ability to dump the firmware over JTAG or via Flash chips.
  - iv. External media-based attacks.
  - v. Power analysis and side channel-based attacks.



# Firmware, Software, and Applications

- The components where you can apply the traditional pentesting:
  - I. Mobile application:
    - a. Reverse engineering the mobile app.
    - b. Runtime manipulation attacks.
  - II. Web-based dashboard
    - a. Client-side injection.
  - III. Insecure network interfaces
    - a. Outdated version with known vulnerabilities
  - IV. Firmware
    - a. Ability to modify firmware.
    - b. Hard-coded sensitive values in the firmware



# Firmware

- Firmware is a software program or set of instructions programmed on a hardware device:
  - Perform functions like basic input/output tasks
  - Low-level control for a device's specific hardware.
  - May act as the device's complete operating system, performing all control.
  - Typically held in non-volatile memory
    - ROM, EPROM, Flash
  - “*Semi-permanent*” since it remains the same unless it is updated by the manufacturer
    - Process that is performed rarely or even never

# Firmware Security Analysis



- Firmware is a software program or set of instructions programmed on a hardware device
- Firmware holds *a ton* of information about the device including:
  - Information on **how the device functions**
  - **Sensitive configurations**
  - **API keys** and more
- Some of the techniques of obtaining a firmware binary of an IoT device includes:
  - Intercepting the *OTA* update and dumping the firmware binary from the network capture
  - Dumping it from the device
  - Reversing the mobile application or trick client to find the remote location of the firmware
  - Downloading the firmware binary from the vendor's website or public forums

# Radio Communications


- Radio in IoT is the component which facilitates communication between any two components.
  - a. Study categories in IoT:
    - a. Software Defined Radio (SDR).
    - b. ZigBee exploitation.
    - c. BLE exploitation
  - b. Common sets of vulnerabilities
    - a. Man-in-the-middle & Replay-based attacks.
    - b. Insecure Cyclic Redundancy Check (CRC) verification.
    - c. Jamming-based & Denial of service (DoS) attacks.
    - d. Lack of encryption.
    - e. Ability to extract sensitive information from radio packets.
    - f. Live radio communication interception and modification.

# Attack Surface Mappin

- Steps required to create an attack surface map:
  1. Components present in the target product.
  2. Prepare an architecture diagram.
  3. Label the components and the communication flows between them.
  4. Identify attack vectors for each component and the communication channel or protocol used.
  5. Categorize the attack vectors based on criticality.

# Attack Surface Mappin

- **High-level architectural diagram** of the entire solution

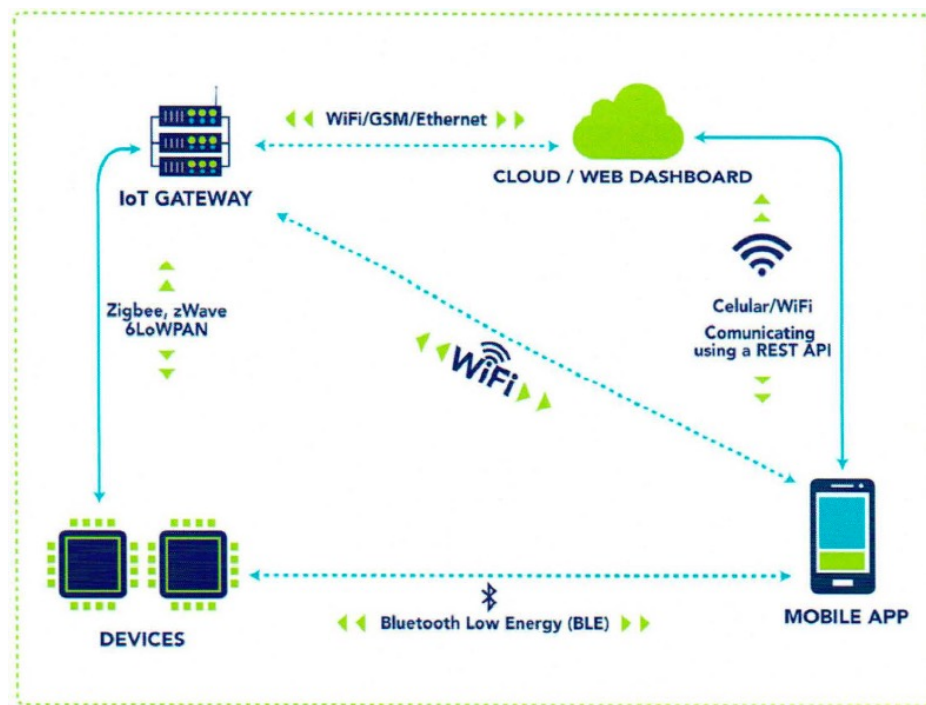

- Understand the different **components** involved, how they **communicate** and identify possible security issues



# Basic information about the device

- In an **official pentest** engagement, the details would be **provided by the client**.
- If it's an independent security research, you could look for these information and fill it up yourself

<b>What is the target product</b>	
<b>URLs (if available)</b>	
<b>Public domain info</b>	
<b>FCC ID</b>	
<b>Technologies Used</b>	
<b>Components in the product</b>	
<b>Mobile Application URLs</b>	
<b>Web Dashboard URLs</b>	
<b>Thick Clients</b>	

# Table of Contents



1. Introduction
2. IoT Pentesting methodology
  1. Attack Surface Mapping
  2. Embedded device
  3. Firmware, software, and applications
  4. Radio communications
3. Identifying Assets
4. Pentest Cases



# Identifying Assets section:

- List down all the components from o *Surface Map*
- Identify user roles which the product supports

ASSET	DESCRIPTION
IP Camera	The IP Camera of the Smart Home solution acts as a constant security cam monitoring motions and clicking picture whenever an event occurs. It also notifies the user whenever a suspicious event has occurred based on the parameters set by the user. The data of the IP Camera is stored for 24 hours on the SDCard, as well as sent to the application servers for the user to view.
LED bulbs	LED Bulbs of the Smart Home solution are controlled by the mobile application via Bluetooth Low Energy and transmit data over ZigBee to the central hub. The LED bulbs also has an automated color setting functionality which can be set by the user in the mobile application.
Mobile applications	The Smart Home solution comes with applications for both Android and iOS platform. It uses BLE to communicate with the local devices and sends data via a REST API to the remote endpoint. The mobile application is built using React Native and includes a number of 3rd party SDKs.
IoT hub	The IoT Smart Home Hub connects to the router/gateway to interface with the external world. It runs on an ARM SoC and provides support for UART, JTAG, SPI and additional communication protocols. It also uses MQTT for messaging over the port 1883. The IoT Hub also holds the configuration information of the entire smart home system and constantly logs information to be stored both locally and sent to the application server to process and provide intelligent insights.
Router	The router takes care of all the network communication happening between the devices and the remote endpoints. It can also selectively block certain devices or provide a pass-through mode for unrestricted access.
USER ROLES	PERMISSION LEVELS
Authenticated User	Able to change the storage location of the camera captures, sensitivity of motion sensors and upload frequency to the web server
Unauthenticated User(Guest)	-
Device Admin	Change the on/off timings of the IP camera, add additional users, modify the user to become an admin, update firmware

# Pentest Cases

- Prepare the **test cases** for each of the various **components** or section of components present in the product

SECTION	COMPONENT / TEST CASE	POSSIBLE VULNERABILITY	HOW TO TEST	IMPACT
<b>MOBILE APPS</b>	RE the Android and iOS application			
	Hardcoded and Sensitive information			
	SSL Pinning			
	Intercepting the communications API			
	Local Data Storage			
	Insecure authentication and authorization checks			
	Business and logic flaws			
	Side channel data leakage			
	Runtime manipulation attacks			
	Insecure network communication			
	Outdated 3rd party libraries and SDKs			
	<b>NETWORK</b>	Secure channel used for communication		
MITM based vulnerabilities				
Fuzzing network communication protocols				
Insecure services running on the target device				
Ports open without authentication required				
<b>RADIO</b>	Radio communication over Insecure Channel			
	Encryption in radio packets			
	Key Storage for Encryption			
	Spoofing and Replay based attacks			

# Pentest



- Now we are ready to start our pentest practices!!
- ... but first let's watch a video and take a quiz to fix the knowledge